

SWIMMING POOL DEHUMIDIFIER DRY 300 PLASTIK

36 l
30 m²

Description:	Cover	Extraction rate (30°C, 60%RH)	Air flow
	plastic (acryl)	36 l/24hrs	550 m ³ /hour



DRY 300P - 1. - 2. - 3. - 4. - 5. - 6.

Basic equipment:

Dehumidifier, wall console, user's manual, installation layout, fixation screws

Price EXW
w/o VAT /EUR/

2 092

DRY 300P

1. Installation:

S - standard - on the wall	0
M - mobile stand, 4 wheels, white color (RAL9010)	193
P - through-the-wall (fiberglass cover with through-the-wall ducts set and removable grilles)	176



2. Control:

S - standard - built-in mechanical humidistat	0
E - remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat	345
W - remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat	79



3. Air temperature:

S - standard - 22°C - 35°C	0
T - 15°C - 35°C (with antifreeze thermostat)	43
V - 22°C - 42°C (with thermostatic expansive valve)	259
A - 15°C - 42°C (T+V)	279
F - 5°C - 35°C (with 4-way valve hot gas defrost)	246




4. Air heating:

S - standard - without LPHW (Low Pressure Hot Water)	0
H - LPHW, without regulation (external contact 230V/5A)	228
V - LPHW, 2 kW, with solenoid valve (in standard version – external contact 230V/5A) (with EASY 300 – fully automatic regulation + no current contact)	442



5. LPHW connection:

S - standard - N/A (without LPHW)	0
B - from the back	0
R - from right	0
L - from left	0

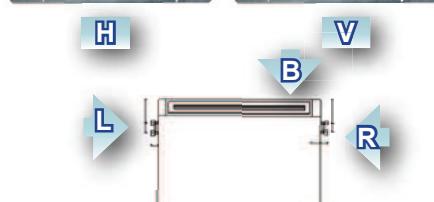

6. Pool Security microLight:

S - standard - without Pool Security microLight	0
L - Pool Security microLight	147



SWIMMING POOL DEHUMIDIFIER DRY 300 METAL

36 l
30 m²

Description:	Cover	Extraction rate (30°C, 60%RH)	Air flow
	metal	36 l/24hrs	550 m ³ /hour

DRY 300M - **1.** - **2.** - **3.** - **4.** - **5.** - **6.** - **7.**

Basic equipment:

Price EXW
w/o VAT /EUR/

2 380

Dehumidifier, wall console, user's manual, installation layout, fixation screws

DRY 300M

1. Color options:**S** - standard - silver color 'Tiger'

0

W - white (RAL9010) glossy

0

B - RAL selection, glossy finish

price on demand

M - RAL selection, mat finish

price on demand

2. Installation:**S** - standard - on the wall

0

M - mobile stand, 4 wheels, color: silver 'Tiger', white (RAL 9010),...

193

3. Control:**S** - standard - built-in digital humidistat & thermostat + built-in mechanical humidistat

0

E - remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)

345

W - remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)

79

4. Air temperature:**S** - standard - 22°C - 35°C

0

T - 15°C - 35°C (with antifreeze thermostat)

43

V - 22°C - 42°C (with thermostatic expansive valve)

259

A - 15°C - 42°C (T+V)

279

F - 5°C - 35°C (with 4-way valve hot gas defrost)

246

5. Air heating:**S** - standard - without LPHW (Low Pressure Hot Water)

0

H - LPHW, 2 kW, without regulation (external no current contact)

228

V - LPHW, 2 kW, fully automatic regulation (with solenoid valve + external no current contact)

442

6. LPHW connection:**S** - standard - N/A (without LPHW)

0

B - from the back

0

R - from right

0

L - from left

0

7. Pool Security microLight:**S** - standard - without Pool Security microLight

0

L - Pool Security microLight

147



SWIMMING POOL DEHUMIDIFIER DRY 300 SILVER

36 l
30 m²

Description:	Cover	Extraction rate (30°C, 60%RH)	Air flow
	Stainless steel cover	36 l/24hrs	550 m ³ /hour



DRY 300S - 1. - 2. - 3. - 4. - 5. - 6.

S

Basic equipment:

Dehumidifier, wall console, user's manual, installation layout, fixation screws

Price EXW
w/o VAT /EUR/

2 615



DRY 300S

1. Installation:

S - standard - on the wall

0

M - mobile stand, 4 wheels, silver color (Tiger)

193

2. Control:

S - standard - built-in digital humidistat & thermostat + built-in mechanical humidistat

0

E - remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)

345

W - remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)

79



3. Air temperature:

S - standard - 22°C - 35°C

0

T - 15°C - 35°C (with antifreeze thermostat)

43

V - 22°C - 42°C (with thermostatic expansive valve)

259

A - 15°C - 42°C (T+V)

279

F - 5°C - 35°C (with 4-way valve hot gas defrost)

246



4. Air heating:

S - standard - without LPHW (Low Pressure Hot Water)

0

H - LPHW, 2 kW, without regulation (external no current contact)

228

V - LPHW, 2 kW, fully automatic regulation (with solenoid valve + external no current contact)

442



5. LPHW connection:

S - standard - N/A (without LPHW)

0

B - from the back

0

R - from right

0

L - from left

0

6. Pool Security microLight:

S - standard - without Pool Security microLight

0

L - Pool Security microLight

147



SWIMMING POOL DEHUMIDIFIER DRY 400 PLASTIK

48 l
45 m²

Description:	Cover	Extraction rate (30°C, 60%RH)	Air flow
	plastic (acryl)	48 l/24hrs	600 m ³ /hour

DRY 400P - **1.** - **2.** - **3.** - **4.** - **5.** - **6.**


Basic equipment:

Dehumidifier, wall console, user's manual, installation layout, fixation screws

Price EXW
w/o VAT /EUR/

2 352

DRY 400P -	1. Installation:	
	S - standard - on the wall	0
	M - mobile stand, 4 wheels, white color (RAL9010)	193
	P - through-the-wall (fiberglass cover with through-the-wall ducts set and removable grilles)	176
	2. Control:	
	S - standard - built-in mechanical humidistat	0
	E - remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat	345
	W - remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat	79
	3. Air temperature:	
	S - standard - 22°C - 42°C	0
	T - 15°C - 42°C (with antifreeze thermostat)	43
	4. Air heating:	
	S - standard - without LPHW (Low Pressure Hot Water)	0
	H - LPHW, 2 kW, without regulation (external contact 230V/5A)	228
	V - LPHW, 2 kW, with solenoid valve (in standard version - external contact 230V/5A) (with EASY 300 - fully automatic regulation + no current contact)	442
	5. LPHW connection:	
	S - standard - N/A (without LPHW)	0
	B - from the back	0
	R - from right	0
	L - from left	0
	6. Pool Security microLight:	
	S - standard - without Pool Security microLight	0
	L - Pool Security microLight	147

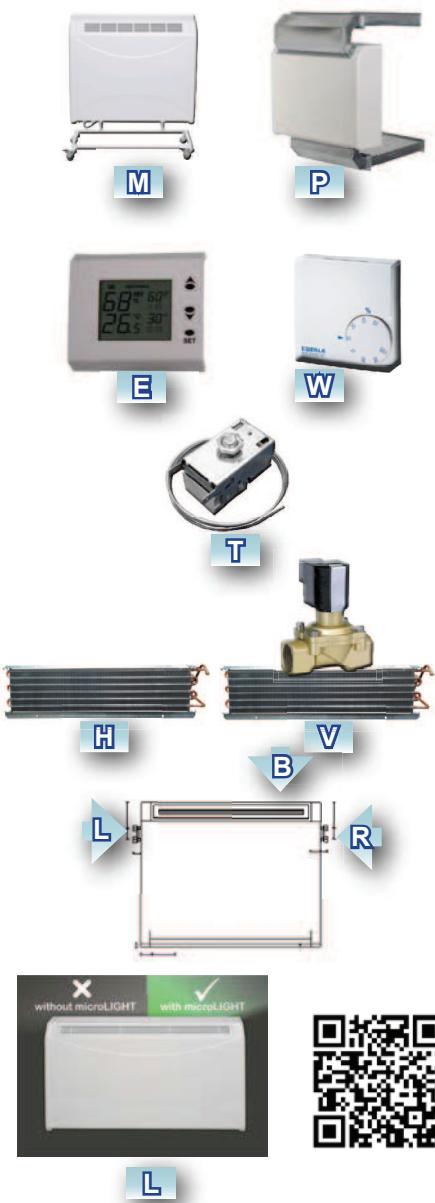

SWIMMING POOL DEHUMIDIFIER DRY 400 METAL

48 l
45 m²

Description:	Cover	Extraction rate (30°C, 60%RH)	Air flow
	metal	48 l/24hod.	600 m ³ /h



DRY 400M - 1. - 2. - 3. - 4. - 5. - 6. - 7.

Basic equipment:

Price EXW
w/o VAT /EUR/

Dehumidifier, wall console, user's manual, installation layout, fixation screws

S

2 830

DRY 400M -

1. Color options:

S - standard - silver color 'Tiger'

0

W - white (RAL9010) glossy

0

B - RAL selection, glossy finish

price on demand

M - RAL selection, mat finish

price on demand



2. Installation:

S - standard - on the wall

0

M - mobile stand, 4 wheels, color: silver 'Tiger', white (RAL 9010),...

193



3. Control:

S - standard - built-in digital humidistat & thermostat + built-in mechanical humidistat

0

E - remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)

345

W - remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)

79



4. Air temperature:

S - standard - 22°C - 42°C

0

T - 15°C - 42°C (with antifreeze thermostat)

43

5. Air heating:

S - standard - without LPHW (Low Pressure Hot Water)

0

H - LPHW, 2 kW, without regulation (external no current contact)

228

V - LPHW, 2 kW, fully automatic regulation (with solenoid valve + external no current contact)

442

6. LPHW connection:

S - standard - N/A (without LPHW)

0

B - from the back

0

R - from right

0

L - from left

0



7. Pool Security microLight:

S - standard - without Pool Security microLight

0

L - Pool Security microLight

147



SWIMMING POOL DEHUMIDIFIER DRY 400 SILVER

48 l
45 m²

Description:	Cover	Extraction rate (30°C, 60%RH)	Air flow
	Stainless steel cover	48 l/24hrs	600 m ³ /hour

DRY 400S - **1.** - **2.** - **3.** - **4.** - **5.** - **6.****Basic equipment:**

Dehumidifier, wall console, user's manual, installation layout, fixation screws

Price EXW
w/o VAT /EUR/**3 115****DRY 400S****1. Installation:**

S - standard - on the wall

0

M - mobile stand, 4 wheels, silver color (Tiger)

193

2. Control:S - standard - built-in digital humidistat & thermostat
+ built-in mechanical humidistat

0

E - remote wireless humidistat & thermostat DRY EASY 300
+ built-in mechanical humidistat (without built-in digital humidistat & thermostat)

345

W - remote wired humidistat EBERLE HYG6001
+ built-in mechanical humidistat (without built-in digital humidistat & thermostat)

79

3. Air temperature:

S - standard - 22°C - 42°C

0

T - 15°C - 42°C (with antifreeze thermostat)

43

4. Air heating:

S - standard - without LPHW (Low Pressure Hot Water)

0

H - LPHW, 2 kW, without regulation (external no current contact)

228

V - LPHW, 2 kW, fully automatic regulation
(with solenoid valve + external no current contact)

442

5. LPHW connection:

S - standard - N/A (without LPHW)

0

B - from the back

0

R - from right

0

L - from left

0


6. Pool Security microLight:

S - standard - without Pool Security microLight

0

L - Pool Security microLight

147

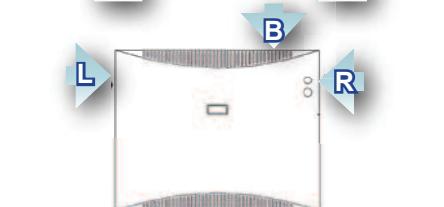

SWIMMING POOL DEHUMIDIFIER DRY 500 PLASTIK

66 l
60 m²

Description:	Cover	Extraction rate (30°C, 60%RH)	Air flow
	plastic (acryl)	66 l/24hrs	800 m ³ /hour

DRY 500P - **1.** - **2.** - **3.** - **4.** - **5.** - **6.**

Basic equipment:

Dehumidifier, wall console, user's manual, installation layout, fixation screws

Price EXW
w/o VAT /EUR/

3 035

DRY 500P - **1. Installation:**

S - standard - on the wall	0
M - mobile stand, 4 wheels, white color (RAL9010)	218
P - through-the-wall (fiberglass cover with through-the-wall ducts set and removable grilles)	233

**2. Control:**

S - standard - built-in mechanical humidistat	0
E - remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat	345
W - remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat	79

**3. Air temperature:**

S - standard - 22°C - 35°C	0
T - 15°C - 35°C (with antifreeze thermostat)	43
V - 22°C - 42°C (with thermostatic expansive valve)	259
A - 15°C - 42°C (T+V)	279
F - 5°C - 35°C (with 4-way valve hot gas defrost)	246

**4. Air heating:**

S - standard - without LPHW (Low Pressure Hot Water)	0
H - LPHW, without regulation (external contact 230V/5A)	246
V - LPHW, 4 kW, with solenoid valve (in standard version – external contact 230V/5A) (with EASY 300 – fully automatic regulation + no current contact)	458

**5. LPHW connection:**

S - standard - N/A (without LPHW)	0
B - from the back	0
R - from right	0
L - from left	0

**6. Pool Security microLight:**

S - standard - without Pool Security microLight	0
L - Pool Security microLight	147



SWIMMING POOL DEHUMIDIFIER DRY 500 METAL

66 l
60 m²

Description:	Cover	Extraction rate (30°C, 60%RH)	Air flow
	metal	66 l/24hrs	800 m ³ /hour



DRY 500M - 1. - 2. - 3. - 4. - 5. - 6. - 7.

Basic equipment:Price EXW
w/o VAT /EUR/Dehumidifier, wall console, user's manual,
installation layout, fixation screws

3 470

S

DRY 500M

1. Color options:

S - standard - silver color 'Tiger'	0
W - white (RAL9010) glossy	0
B - RAL selection, glossy finish	price on demand
M - RAL selection, mat finish	price on demand



W



M



S

E

W



T

V

F



H

V

B



L

R

R

2. Installation:

S - standard - on the wall	0
M - mobile stand, 4 wheels, color: silver 'Tiger', white (RAL 9010),...	218

3. Control:

S - standard - built-in digital humidistat & thermostat + built-in mechanical humidistat	0
E - remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	345
W - remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	79

4. Air temperature:

S - standard - 22°C - 35°C	0
T - 15°C - 35°C (with antifreeze thermostat)	43
V - 22°C - 42°C (with thermostatic expansive valve)	259
A - 15°C - 42°C (T+V)	279
F - 5°C - 35°C (with 4-way valve hot gas defrost)	246

5. Air heating:

S - standard - without LPHW (Low Pressure Hot Water)	0
H - LPHW, 4 kW, without regulation (external no current contact)	246
V - LPHW, 4 kW, fully automatic regulation (with solenoid valve + external no current contact)	458

6. LPHW connection:

S - standard - N/A (without LPHW)	0
B - from the back	0
R - from right	0
L - from left	0


7. Pool Security microLight:

S - standard - without Pool Security microLight	0
L - Pool Security microLight	147



SWIMMING POOL DEHUMIDIFIER DRY 500 SILVER

Description:	Cover	Extraction rate (30°C, 60%RH)	Air flow
	Stainless steel cover	66 l/24hrs	800 m³/hour

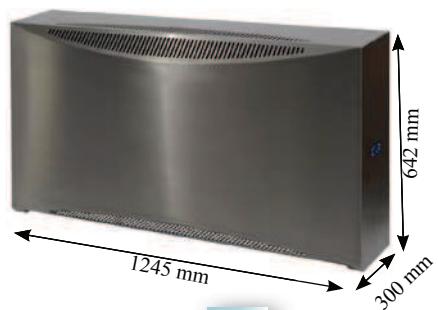66 l
60 m²DRY 500S - **1.** - **2.** - **3.** - **4.** - **5.** - **6.****Basic equipment:**

Dehumidifier, wall console, user's manual, installation layout, fixation screws

Price EXW
w/o VAT /EUR/**3 864****1. Installation:**

S - standard - on the wall	0
M - mobile stand, 4 wheels, silver color (Tiger)	218

2. Control:

S - standard - built-in digital humidistat & thermostat + built-in mechanical humidistat	0
E - remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	345
W - remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	79

3. Air temperature:

S - standard - 22°C - 35°C	0
T - 15°C - 35°C (with antifreeze thermostat)	43
V - 22°C - 42°C (with thermostatic expansive valve)	259
A - 15°C - 42°C (T+V)	279
F - 5°C - 35°C (with 4-way valve hot gas defrost)	246

4. Air heating:


S - standard - without LPHW (Low Pressure Hot Water)	0
H - LPHW, 4 kW, without regulation (external no current contact)	246
V - LPHW, 4 kW, fully automatic regulation (with solenoid valve + external no current contact)	458

5. LPHW connection:

S - standard - N/A (without LPHW)	0
B - from the back	0
R - from right	0
L - from left	0

6. Pool Security microLight:


S - standard - without Pool Security microLight	0
L - Pool Security microLight	147

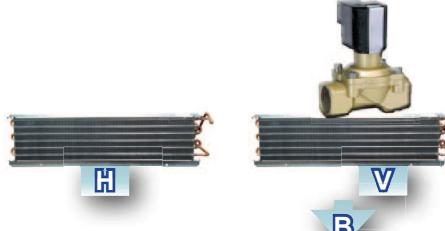

SWIMMING POOL DEHUMIDIFIER DRY 800 METAL

90 l
90 m²

Description:	Cover	Extraction rate (30°C, 60%RH)	Air flow
	metal	90 l/24hrs	1100 m ³ /hour

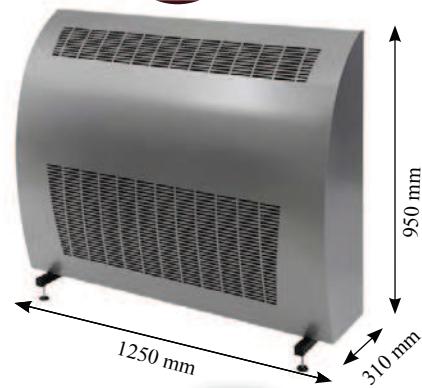

DRY 800M - 1. - 2. - 3. - 4. - 5. - 6. - 7.

Basic equipment:	Price EXW w/o VAT /EUR/
Dehumidifier, floor feet, user's manual	4 270

DRY 800M -


• 1. Color options:		
S - standard - silver color 'Tiger'	0	
W - white (RAL9010) glossy	0	
B - RAL selection, glossy finish	price on demand	
M - RAL selection, mat finish	price on demand	
• 2. Installation:		
S - standard - on the floor	0	
W - on the wall (floor feet + wall console)	135	
P - through the wall (cover with no air inlet/outlet cutouts, including the through-the-wall ducts set and removable grilles), color: white RAL 9010	278	
• 3. Control:		
S - standard - built-in digital humidistat & thermostat + built-in mechanical humidistat	0	
E - remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	345	
W - remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	79	
• 4. Air temperature:		
S - standard - 22°C - 35°C	0	
T - 15°C - 35°C (with antifreeze thermostat)	43	
• 5. Air heating:		
S - standard - without LPHW (Low Pressure Hot Water)	0	
H - LPHW, 6 kW, without regulation (external no current contact)	313	
V - LPHW, 6 kW, fully automatic regulation (with solenoid valve + external no current contact)	524	
• 6. LPHW connection:		
S - standard - N/A (without LPHW)	0	
B - from the back	0	
R - from right	0	
• 7. Pool Security microLight:		
S - standard - without Pool Security microLight	0	
L - Pool Security microLight	147	



SWIMMING POOL DEHUMIDIFIER DRY 1200 METAL

120 l
120 m²

Description:	Cover	Extraction rate (30°C, 60%RH)	Air flow
	metal	120 l/24hrs	1100 m ³ /hour

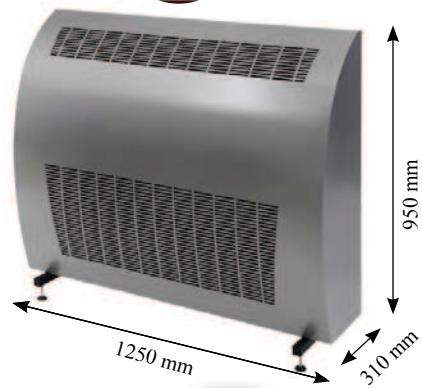

DRY 1200M - [1.] - [2.] - [3.] - [4.] - [5.] - [6.] - [7.]

Basic equipment:

Price EXW
w/o VAT /EUR/

Dehumidifier, floor feet, user's manual

4 990

DRY 1200M -

1. Color options:

S - standard - silver color 'Tiger'	0
W - white (RAL9010) glossy	0
B - RAL selection, glossy finish	price on demand
M - RAL selection, mat finish	price on demand



2. Installation:

S - standard - on the floor	0
W - on the wall (floor feet + wall console)	135
P - through the wall (cover with no air inlet/outlet cutouts, including the through-the-wall ducts set and removable grilles), color: white RAL 9010	278



3. Control:

S - standard - built-in digital humidistat & thermostat + built-in mechanical humidistat	0
E - remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	345
W - remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	79



4. Air temperature:

S - standard - 22°C - 35°C	0
T - 15°C - 35°C (with antifreeze thermostat)	43



5. Air heating:

S - standard - without LPHW (Low Pressure Hot Water)	0
H - LPHW, 6 kW, without regulation (external no current contact)	313
V - LPHW, 6 kW, fully automatic regulation (with solenoid valve + external no current contact)	524




6. LPHW connection:

S - standard - N/A (without LPHW)	0
B - from the back	0
R - from right	0



7. Pool Security microLight:

S - standard - without Pool Security microLight	0
L - Pool Security microLight	147

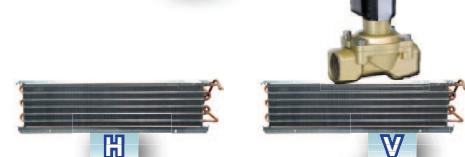

SWIMMING POOL DEHUMIDIFIER DRY 500 DUCT

52 l
50 m²

Description:	Cover	Extraction rate (30°C, 60%RH)	Air flow
	metal	52 l/24hrs	800 m ³ /hour, 300 Pa or 1200 m ³ /hour, 200 Pa



DRY 500D - 1. - 2. - 3. - 4. - 5.

S

Basic equipment:

Price EXW
w/o VAT /EUR/

3 540

Dehumidifier, wall console, user's manual, fixation screws, installation layout

DRY 500D -

1. Control:

- S - standard - built-in digital humidistat & thermostat + built-in mechanical humidistat
- E - remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)
- W - remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)

0

345

79



2. Air temperature:

- S - standard - 22°C - 35°C
- T - 15°C - 35°C (with antifreeze thermostat)
- V - 22°C - 42°C (with thermostatic expansive valve)
- A - 15°C - 42°C (T+V)
- F - 5°C - 35°C (with 4-way valve hot gas defrost)

0

43

259

279

246



3. Air heating:

- S - standard - without LPHW (Low Pressure Hot Water)
- H - LPHW, 4 kW, without regulation (external no current contact)
- V - LPHW, 4 kW, fully automatic regulation (with solenoid valve + external no current contact)

0

246

458



4. LPHW connection:

- S - standard - N/A (without LPHW)
- B - from the back
- R - from right

0

0

0



5. Air flow & external pressure:

- S - standard - 800 m³/h, 300 Pa (*)
- R - DC - 1200 m³/h, 200 Pa (**)

0

0

SWIMMING POOL DEHUMIDIFIER DRY 800 DUCT

88 l
80 m²

Description:	Cover	Extraction rate (30°C, 60%RH)	Air flow
	metal	88 l/24hrs	1200 m ³ /hour, 200 Pa

DRY 800D - **1.** - **2.** - **3.** - **4.**

Basic equipment:

Dehumidifier, floor feet, user's manual, installation layout

Price EXW
w/o VAT /EUR/

4 540

DRY 800D -

1. Control:**S** - standard - built-in digital humidistat & thermostat
+ built-in mechanical humidistat

0

E - remote wireless humidistat & thermostat DRY EASY 300
+ built-in mechanical humidistat (without built-in digital humidistat & thermostat)

345

W - remote wired humidistat EBERLE HYG6001
+ built-in mechanical humidistat (without built-in digital humidistat & thermostat)

79

2. Air temperature:**S** - standard - 22°C - 35°C

0

T - 15°C - 35°C (with antifreeze thermostat)

43

3. Air heating:**S** - standard - without LPHW (Low Pressure Hot Water)

0

H - LPHW, 6 kW, without regulation (external no current contact)

313

V - LPHW, 6 kW, fully automatic regulation (with solenoid valve + external no current contact)

524

4. LPHW connection:**S** - standard - N/A (without LPHW)

0

B - from the back

0

R - from right

0



SWIMMING POOL DEHUMIDIFIER DRY 1200 DUCT

112 l
110 m²

Description:	Cover	Extraction rate (30°C, 60%RH)	Air flow
	metal	112 l/24hrs	1400 m ³ /hour, 190 Pa

DRY 1200D - **1.** - **2.** - **3.** - **4.**

Basic equipment:

Dehumidifier, floor feet, user's manual, installation layout

Price EXW
w/o VAT /EUR/

5 490

DRY 1200D -

1. Control:

- S - standard - built-in digital humidistat & thermostat
+ built-in mechanical humidistat
- E - remote wireless humidistat & thermostat DRY EASY 300
+ built-in mechanical humidistat (without built-in digital humidistat & thermostat)
- W - remote wired humidistat EBERLE HYG6001
+ built-in mechanical humidistat (without built-in digital humidistat & thermostat)

0

345

79



2. Air temperature:

- S - standard - 22°C - 35°C
- T - 15°C - 35°C (with antifreeze thermostat)

0

43



3. Air heating:

- S - standard - without LPHW (Low Pressure Hot Water)
- H - LPHW, 6 kW, without regulation (external no current contact)
- V - LPHW, 6 kW, fully automatic regulation (with solenoid valve + external no current contact)

0

313

524



4. LPHW connection:

- S - standard - N/A (without LPHW)
- B - from the back
- R - from right

0

0

0






HEAT PUMP HP 900 COMPACT

9 kW
40 m³

COP	Cover	Heat output	Cooling output
5.8 (A25 W10)*	metal	9 kW (A25 W10)*	6.5 kW (A30 W35)*

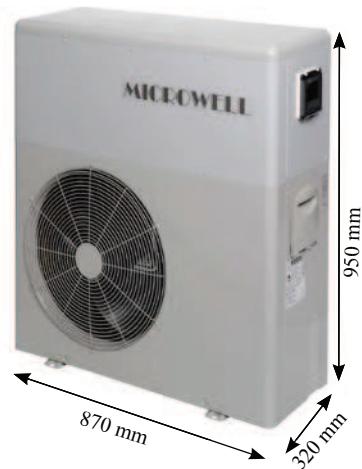

HP 900 COMPACT


Basic equipment:	Price EXW w/o VAT /EUR/
Heat pump, user's manual	1 450



HEAT PUMP HP 1200 COMPACT

12 kW
60 m³

COP	Cover	Heat output	Cooling output
5.8 (A25 W10)*	metal	12 kW (A25 W10)*	9.5 kW (A30 W35)*

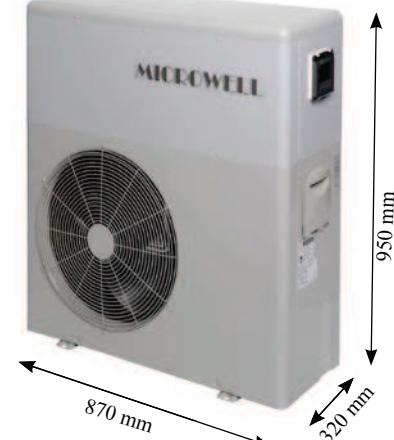

HP 1200 COMPACT

Basic equipment:	Price EXW w/o VAT /EUR/
Heat pump, user's manual	1 590






HEAT PUMP HP 900 COMPACT Omega

9.1 kW
40 m³

NEW

COP	Cover	Heat output	Cooling output
6.1 (A25 W10)*	metal	9.1 kW (A25 W10)*	6.5 kW (A30 W35)*

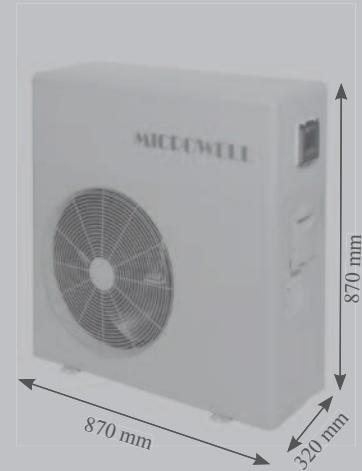

HP 900 COMPACT - O

Available from June 1, 2015

Basic equipment:	Price EXW w/o VAT /EUR/
Heat pump, user's manual	1 450




HEAT PUMP HP 900 COMPACT Premium

10 kW
40 m³

NEW

COP	Cover	Heat output	Cooling output
6.7 (A25 W10)*	metal	10 kW (A25 W10)*	7.2 kW (A30 W35)*

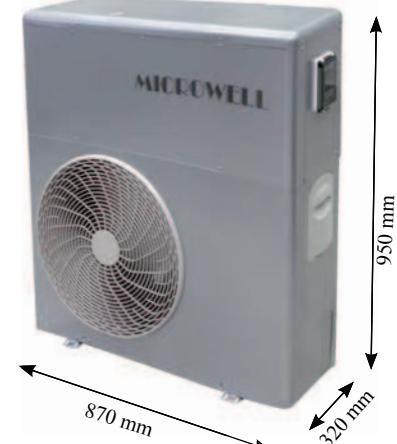

HP 900 COMPACT - P

Basic equipment:	Price EXW w/o VAT /EUR/
Heat pump, user's manual	2 230





HEAT PUMP HP 1200 COMPACT Omega


12 kW
60 m³

NEW

COP	Cover	Heat output	Cooling output
6.1 (A25 W10)*	metal	12.1 kW (A25 W10)*	9.5 kW (A30 W35)*

HP 1200 COMPACT - O

Available from June 1, 2015

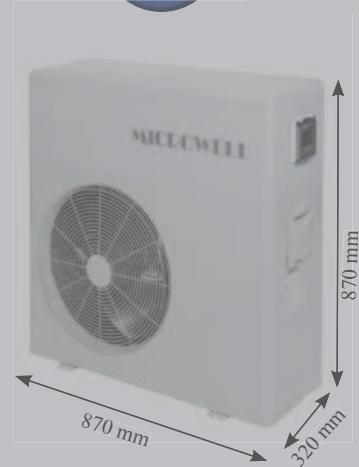

Basic equipment:

Price EXW
w/o VAT /EUR/

Heat pump, user's manual

1 590




HEAT PUMP HP 1200 COMPACT Premium

13 kW
60 m³

NEW

COP	Cover	Heat output	Cooling output
6.7 (A25 W10)*	metal	13 kW (A25 W10)*	10.3 kW (A30 W35)*

HP 1200 COMPACT - P

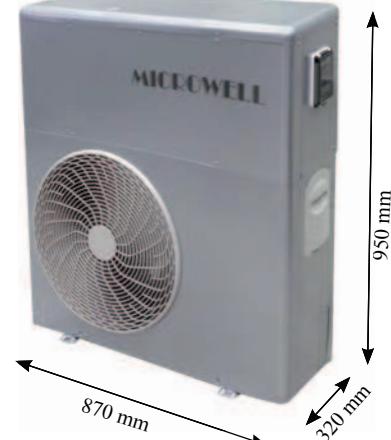

Basic equipment:

Price EXW
w/o VAT /EUR/

Heat pump, user's manual

2 340





HEAT PUMP HP 2000 COMPACT

20 kW
80 m³

NEW

COP	Cover	Heat output	Cooling output
6.5 (A25 W10)*	metal	20 kW (A25 W10)*	17.5 kW (A30 W35)*

HP 2000 COMPACT

Available from July 1, 2015

Basic equipment:	Price EXW w/o VAT /EUR/
Heat pump, user's manual	3 090



Picture is illustratory.



HEAT PUMP HP 2600 COMPACT

26 kW
120 m³

NEW

COP	Cover	Heat output	Cooling output
6.5 (A25 W10)*	metal	26 kW (A25 W10)*	23 kW (A30 W35)*

HP 2600 COMPACT

Available from July 1, 2015

Basic equipment:	Price EXW w/o VAT /EUR/
Heat pump, user's manual	3 590



Picture is illustratory.



HEAT PUMP HP 900 SPLIT


9 kW
40 m³

COP	Cover	Heat output	Cooling output
5.8 (A25 W10)*	metal	9 kW (A25 W10)*	6.5 kW (A30 W35)*

HP 900 SPLIT [1.-2.]

HP 900 SPLIT -

Basic equipment:		Price EXW w/o VAT /EUR/
Heat pump, user's manual		1 580
1.	Control panel placement:	
S	- standard - digital panel on outside unit (air unit)	0
H	- digital panel on remote heat exchanger (heat exchanger box to be installed in interior)	0
2.	Connecting cable length:	
S	- standard - 10 m	0
M	- 20 m	46
L	- 30 m	67

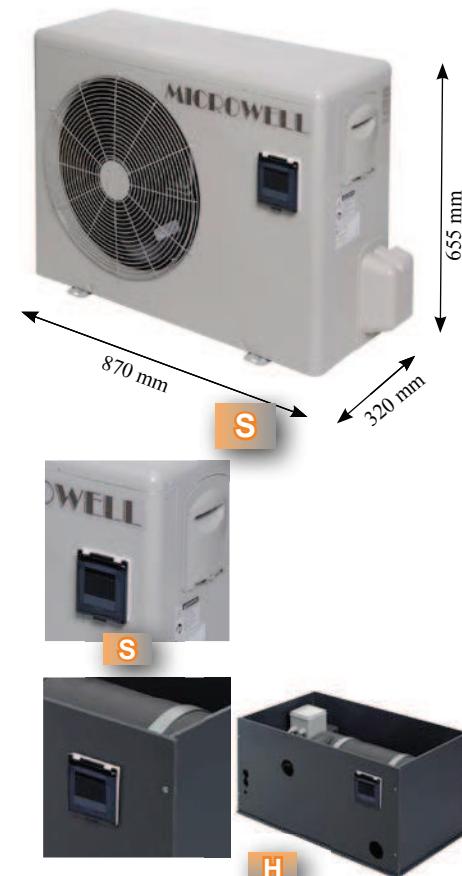

HEAT PUMP HP 1200 SPLIT


12 kW
60 m³

COP	Cover	Heat output	Cooling output
5.8 (A25 W10)*	metal	12 kW (A25 W10)*	9.5 kW (A30 W35)*

HP 1200 SPLIT [1.-2.]

HP 1200 SPLIT -

Basic equipment:		Price EXW w/o VAT /EUR/
Heat pump, user's manual		1 850
1.	Control panel placement:	
S	- standard - digital panel on outside unit (air unit)	0
H	- digital panel on remote heat exchanger (heat exchanger box to be installed in interior)	0
2.	Connecting cable length:	
S	- standard - 10 m	0
M	- 20 m	46
L	- 30 m	67

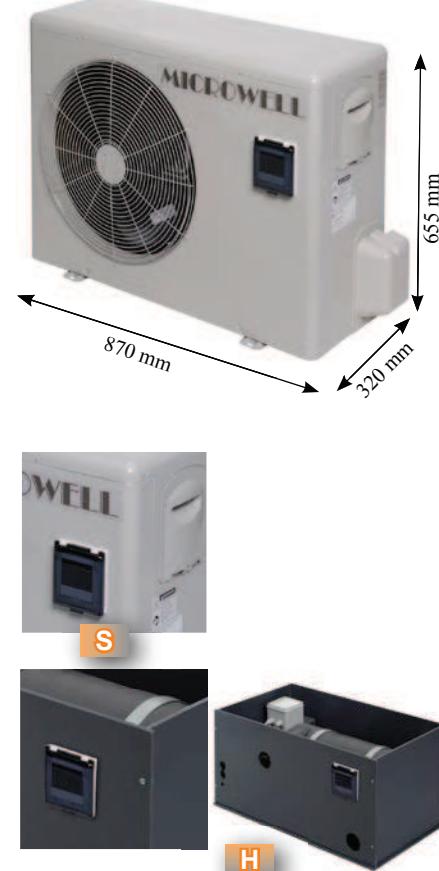




HEAT PUMP HP 900 SPLIT Omega

9.1 kW
40 m³

NEW

COP	Cover	Heat output	Cooling output
6.1 (A25 W10)*	metal	9.1 kW (A25 W10)*	6.5 kW (A30 W35)*
HP 900 SPLIT O -1.-2.-3.			

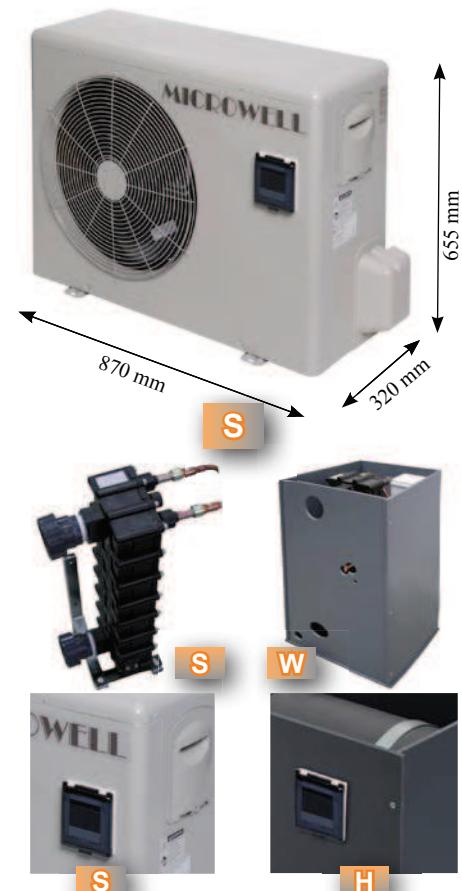

HP 900 SPLIT O -

Basic equipment:		Price EXW w/o VAT /EUR/
Air unit, user's manual		930
1. Hydro kit (unit with water heat exchanger):		
S - without box		520
W - with box		650
2. Control panel placement:		
S - standard - digital panel on outside unit (air unit)		0
H - digital panel on remote heat exchanger (heat exchanger box to be installed in interior)		0
3. Connecting cable length:		
S - standard - 10 m		0
M - 20 m		46
L - 30 m		67

Available from June 1, 2015

HEAT PUMP HP 900 SPLIT Premium


10 kW
40 m³

NEW

COP	Cover	Heat output	Cooling output
6.7 (A25 W10)*	metal	10 kW (A25 W10)*	7.2 kW (A30 W35)*
HP 900 SPLIT P -1.-2.-3.-4.			

HP 900 SPLIT P -

Basic equipment:		Price EXW w/o VAT /EUR/
Air unit, user's manual		1 310
1. Hydro kit (unit with water heat exchanger):		
S - without box		805
W - with box		930
2. Control panel placement:		
S - standard - digital panel on outside unit (air unit)		0
H - digital panel on remote heat exchanger (heat exchanger box to be installed in interior)		0
3. Connecting cable length:		
S - standard - 10 m		0
M - 20 m		46
L - 30 m		67
4. Full year modification:		
S - without WINTER modul (-5°C ... 40°C)		0
W - with WINTER modul (-15°C ... 40°C)		325

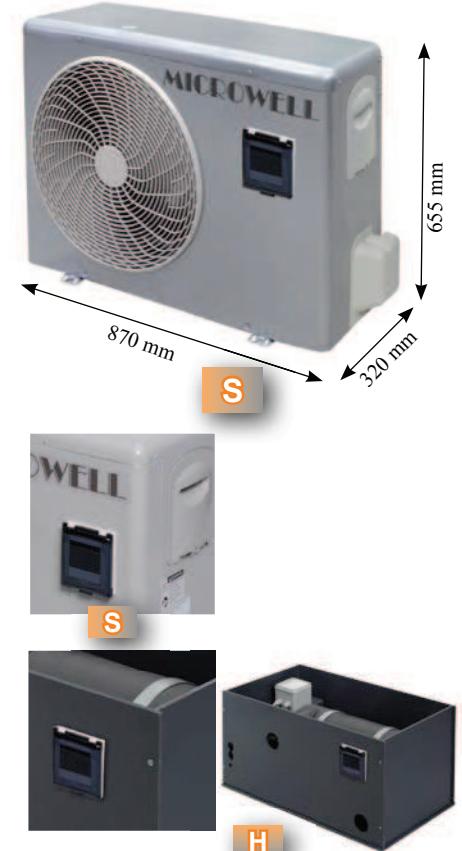



HEAT PUMP HP 1200 SPLIT Omega

12.1 kW
60 m³


NEW

COP	Cover	Heat output	Cooling output
6.1 (A25 W10)*	metal	12.1 kW (A25 W10)*	9.5 kW (A30 W35)*

HP 1200 SPLIT O - 1. - 2. - 3.

HP 1200 SPLIT O -

Basic equipment:		Price EXW w/o VAT /EUR/
Air unit, user's manual		1 080
1. Hydro kit (unit with water heat exchanger):		
S - without box		630
W - with box		770
2. Control panel placement:		
S - standard - digital panel on outside unit (air unit)		0
H - digital panel on remote heat exchanger (heat exchanger box to be installed in interior)		0
3. Connecting cable length:		
S - standard - 10 m		0
M - 20 m		46
L - 30 m		67

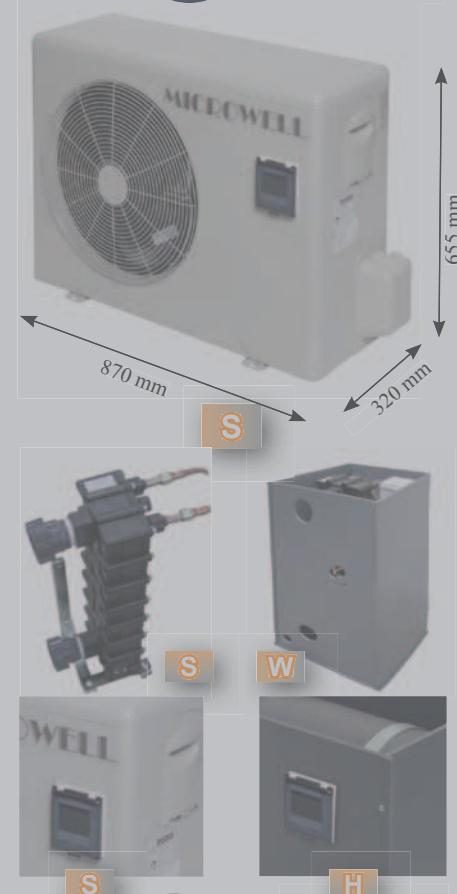

HEAT PUMP HP 1200 SPLIT Premium

13 kW
60 m³

NEW

COP	Cover	Heat output	Cooling output
6.7 (A25 W10)*	metal	13 kW (A25 W10)*	10.3 kW (A30 W35)*

HP 1200 SPLIT P - 1. - 2. - 3. - 4.

HP 1200 SPLIT P -

Basic equipment:		Price EXW w/o VAT /EUR/
Air unit, user's manual		1 390
1. Hydro kit (unit with water heat exchanger):		
S - without box		845
W - with box		970
2. Control panel placement:		
S - standard - digital panel on outside unit (air unit)		0
H - digital panel on remote heat exchanger (heat exchanger box to be installed in interior)		0
3. Connecting cable length:		
S - standard - 10 m		0
M - 20 m		46
L - 30 m		67
4. Full year modification:		
S - without WINTER modul (-5°C ... 40°C)		0
W - with WINTER modul (-15°C ... 40°C)		325

